

(The program will automatically create the first layer of server(s) for receiving arrivals from outside the network)

Specify number of servers in the first layer

Specify the arrival rate, service rate, active\_cap and deactive\_t for the first server

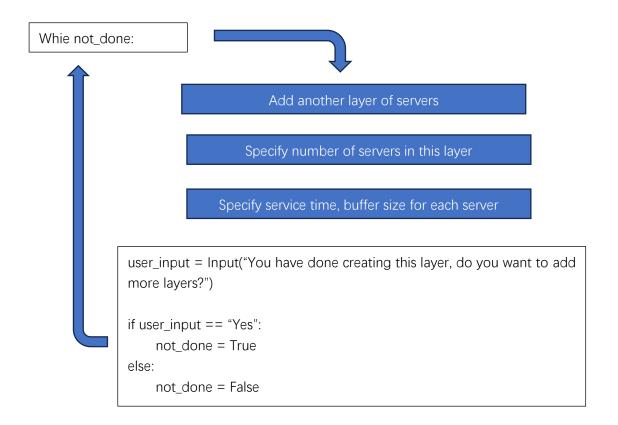

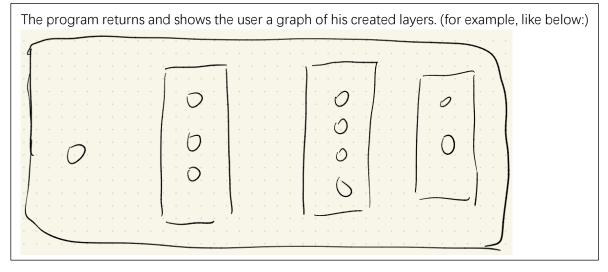

Here the user can connect any two nodes, then when he done, we receive a final configuration and convert it into inputs for our Queue\_network Class