

# Quantum Computation (CO484)

## Quantum Algorithms: Deutsch Problem

Herbert Wiklicky

herbert@doc.ic.ac.uk

Autumn 2017

# Balanced Functions

## Definition

A function  $f : \{0, 1\} \rightarrow \{0, 1\}$  is called **balanced** if  $f(0) \neq f(1)$ .

# Balanced Functions

## Definition

A function  $f : \{0, 1\} \rightarrow \{0, 1\}$  is called **balanced** if  $f(0) \neq f(1)$ .

A balanced function on  $\{0, 1\}$  is one-to-one. There are two **balanced** functions on  $\{0, 1\}$ :

$$\begin{array}{ll} 0 \mapsto 0 & 0 \mapsto 1 \\ 1 \mapsto 1 & 1 \mapsto 0 \end{array}$$

# Balanced Functions

## Definition

A function  $f : \{0, 1\} \rightarrow \{0, 1\}$  is called **balanced** if  $f(0) \neq f(1)$ .

A balanced function on  $\{0, 1\}$  is one-to-one. There are two **balanced** functions on  $\{0, 1\}$ :


$$\begin{array}{ll} 0 \mapsto 0 & 0 \mapsto 1 \\ 1 \mapsto 1 & 1 \mapsto 0 \end{array}$$

and two **constant** functions on  $\{0, 1\}$ .

$$\begin{array}{ll} 0 \mapsto 0 & 0 \mapsto 1 \\ 1 \mapsto 0 & 1 \mapsto 1 \end{array}$$


# Deutsch Problem

We can represent any function  $f$  on  $\{0, 1\}$  by a quantum device i.e. as a unitary  $\mathbf{U}_f$  on  $\mathbb{C}^2 \otimes \mathbb{C}^2$  (making it thereby reversible):

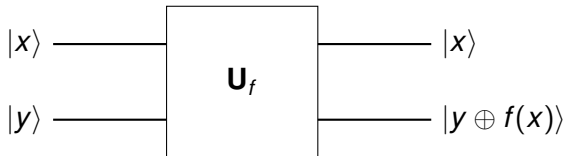

# Deutsch Problem


We can represent any function  $f$  on  $\{0, 1\}$  by a quantum device i.e. as a unitary  $\mathbf{U}_f$  on  $\mathbb{C}^2 \otimes \mathbb{C}^2$  (making it thereby reversible):

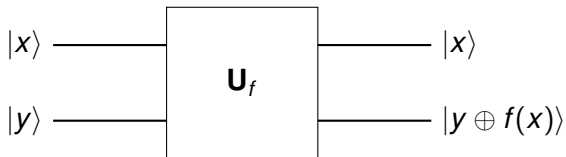

e.g.  $f = \begin{cases} 0 \mapsto 1 \\ 1 \mapsto 0 \end{cases}$  has  $\mathbf{U}_f = \begin{pmatrix} 0 & 1 & 0 & 0 \\ 1 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{pmatrix}$

# Deutsch Problem

We can represent any function  $f$  on  $\{0, 1\}$  by a quantum device i.e. as a unitary  $\mathbf{U}_f$  on  $\mathbb{C}^2 \otimes \mathbb{C}^2$  (making it thereby reversible):

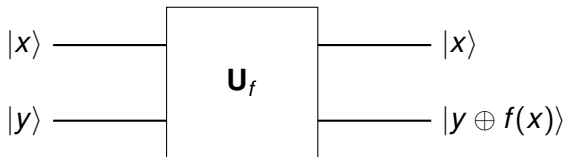


$$\text{e.g. } f = \begin{cases} 0 \mapsto 1 \\ 1 \mapsto 0 \end{cases} \quad \text{has } \mathbf{U}_f = \begin{pmatrix} 0 & 1 & 0 & 0 \\ 1 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{pmatrix}$$

Can one determine whether a function on  $\{0, 1\}$  is balanced or not using  $\mathbf{U}_f$  only once?

## Deutsch Problem

We can represent any function  $f$  on  $\{0, 1\}$  by a quantum device i.e. as a unitary  $\mathbf{U}_f$  on  $\mathbb{C}^2 \otimes \mathbb{C}^2$  (making it thereby reversible):

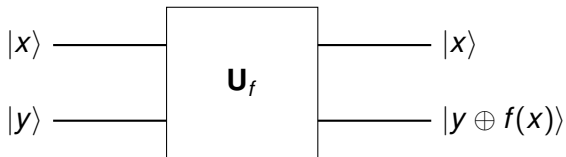


$$\text{e.g. } f = \begin{cases} 0 \mapsto 1 \\ 1 \mapsto 0 \end{cases} \quad \text{has } \mathbf{U}_f = \begin{pmatrix} 0 & 1 & 0 & 0 \\ 1 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{pmatrix}$$


Can one determine whether a function on  $\{0, 1\}$  is balanced or not using  $\mathbf{U}_f$  only once? Classically: Need to evaluate  $f$  twice.




# A QCircuit for Deutsch – Version 1

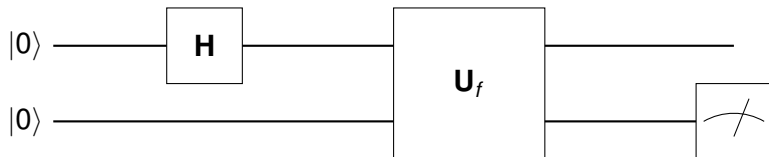

# A QCircuit for Deutsch – Version 1

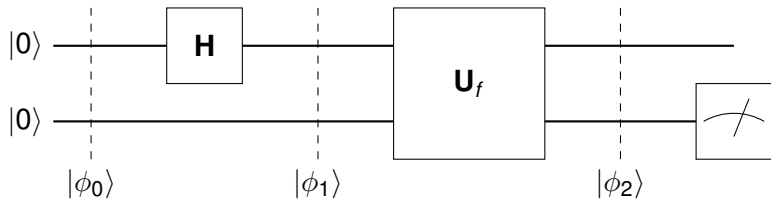


# A QCircuit for Deutsch – Version 1

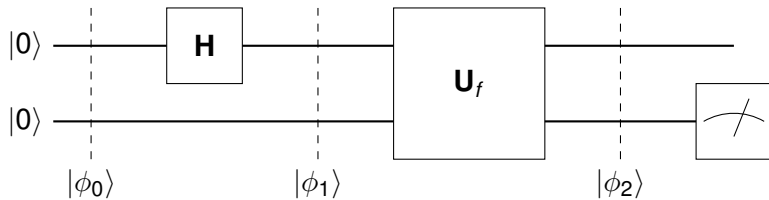

$$|\phi_0\rangle = |0\rangle \otimes |0\rangle = |0\rangle |0\rangle = |00\rangle$$


# A QCircuit for Deutsch – Version 1

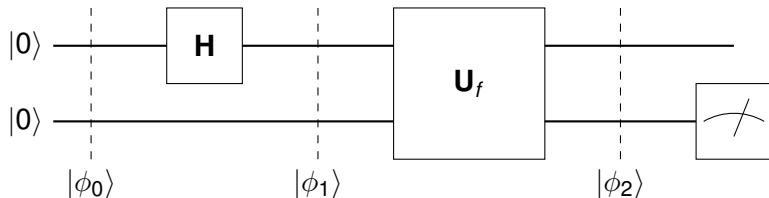

$$|\phi_0\rangle = |0\rangle \otimes |0\rangle = |0\rangle |0\rangle = |00\rangle$$

$$|\phi_1\rangle = (H \otimes I) |0\rangle |0\rangle = \frac{1}{\sqrt{2}}(|0\rangle + |1\rangle) |0\rangle = \frac{1}{\sqrt{2}}(|00\rangle + |10\rangle)$$

# A QCircuit for Deutsch – Version 1

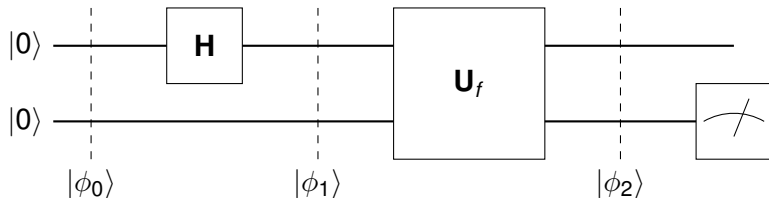

$$|\phi_0\rangle = |0\rangle \otimes |0\rangle = |0\rangle |0\rangle = |00\rangle$$

$$|\phi_1\rangle = (H \otimes I) |0\rangle |0\rangle = \frac{1}{\sqrt{2}}(|0\rangle + |1\rangle) |0\rangle = \frac{1}{\sqrt{2}}(|00\rangle + |10\rangle)$$

$$|\phi_2\rangle = \frac{1}{\sqrt{2}}(|0, f(0)\rangle + |1, f(1)\rangle)$$

# Superposition via Hadamard Gate

The important step in this circuit is involving the Hadamard Gate **H**. It's aim is to create a **superposition** of the base vectors  $|0\rangle$  and  $|1\rangle$ , i.e. of all possible inputs:

## Superposition via Hadamard Gate

The important step in this circuit is involving the Hadamard Gate **H**. It's aim is to create a **superposition** of the base vectors  $|0\rangle$  and  $|1\rangle$ , i.e. of all possible inputs:

$$\begin{aligned}(\mathbf{H} \otimes \mathbf{I})(|0\rangle \otimes |0\rangle) &= \\&= \left( \frac{1}{\sqrt{2}} \begin{pmatrix} 1 & 1 \\ 1 & -1 \end{pmatrix} \otimes \begin{pmatrix} 1 & 0 \\ 0 & 1 \end{pmatrix} \right) (|0\rangle \otimes |0\rangle) = \\&= \frac{1}{\sqrt{2}}(|0\rangle + |1\rangle) \otimes |0\rangle\end{aligned}$$

# Swap Function – QCircuit Version 1

If we consider concretely the “swap” function  $0 \mapsto 1$  and  $1 \mapsto 0$ .

$$|\phi_0\rangle = (1, 0, 0, 0)^T$$



# Swap Function – QCircuit Version 1

If we consider concretely the “swap” function  $0 \mapsto 1$  and  $1 \mapsto 0$ .

$$|\phi_0\rangle = (1, 0, 0, 0)^T$$

$$|\phi_1\rangle = \left(\frac{1}{\sqrt{2}}, 0, \frac{1}{\sqrt{2}}, 0\right)^T$$

# Swap Function – QCircuit Version 1

If we consider concretely the “swap” function  $0 \mapsto 1$  and  $1 \mapsto 0$ .

$$|\phi_0\rangle = (1, 0, 0, 0)^T$$

$$|\phi_1\rangle = \left(\frac{1}{\sqrt{2}}, 0, \frac{1}{\sqrt{2}}, 0\right)^T$$

$$|\phi_2\rangle = \begin{pmatrix} 0 & 1 & 0 & 0 \\ 1 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{pmatrix} \begin{pmatrix} \frac{1}{\sqrt{2}} \\ 0 \\ \frac{1}{\sqrt{2}} \\ 0 \end{pmatrix} = \begin{pmatrix} 0 \\ \frac{1}{\sqrt{2}} \\ \frac{1}{\sqrt{2}} \\ 0 \end{pmatrix}$$

# Swap Function – QCircuit Version 1

If we consider concretely the “swap” function  $0 \mapsto 1$  and  $1 \mapsto 0$ .


$$|\phi_0\rangle = (1, 0, 0, 0)^T$$

$$|\phi_1\rangle = \left(\frac{1}{\sqrt{2}}, 0, \frac{1}{\sqrt{2}}, 0\right)^T$$


$$|\phi_2\rangle = \begin{pmatrix} 0 & 1 & 0 & 0 \\ 1 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{pmatrix} \begin{pmatrix} \frac{1}{\sqrt{2}} \\ 0 \\ \frac{1}{\sqrt{2}} \\ 0 \end{pmatrix} = \begin{pmatrix} 0 \\ \frac{1}{\sqrt{2}} \\ \frac{1}{\sqrt{2}} \\ 0 \end{pmatrix}$$

**Problem:** Measuring (either the first or second qubit) of  $(0, \frac{1}{\sqrt{2}}, \frac{1}{\sqrt{2}}, 0)^T$  in the standard base has a 50:50 chance to measure  $|0\rangle$  and  $|1\rangle$ .


## A QCircuit for Deutsch – Version 2

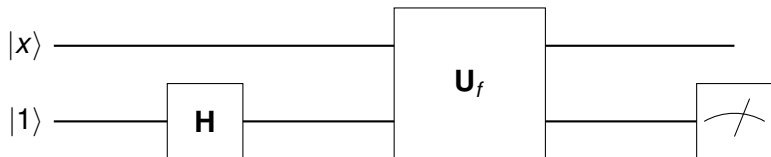

# A QCircuit for Deutsch – Version 2

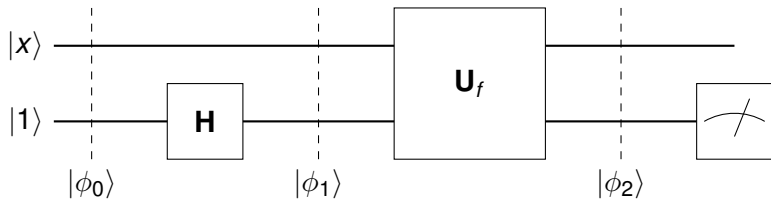


## A QCircuit for Deutsch – Version 2

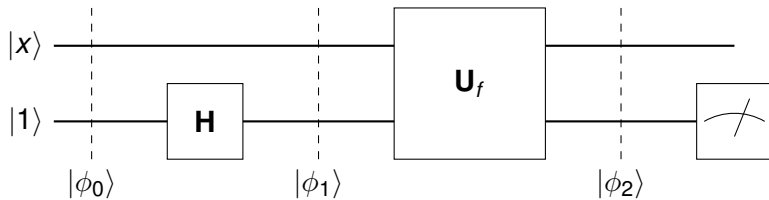

$$|\phi_0\rangle = |x\rangle \otimes |1\rangle = |x\rangle |1\rangle = |x, 1\rangle$$


## A QCircuit for Deutsch – Version 2

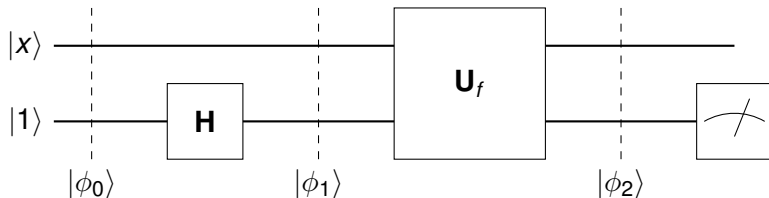

$$|\phi_0\rangle = |x\rangle \otimes |1\rangle = |x\rangle |1\rangle = |x, 1\rangle$$

$$|\phi_1\rangle = (\mathbf{I} \otimes \mathbf{H}) |x\rangle |1\rangle = \frac{1}{\sqrt{2}} |x\rangle (|0\rangle - |1\rangle) = \frac{1}{\sqrt{2}} (|x, 0\rangle - |x, 1\rangle)$$

## A QCircuit for Deutsch – Version 2

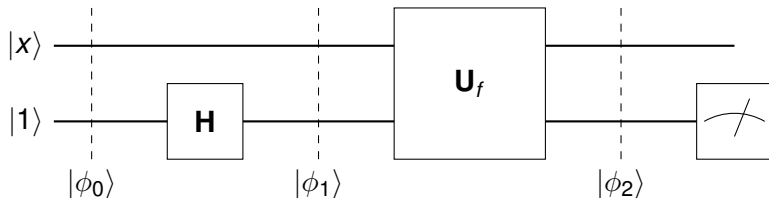

$$|\phi_0\rangle = |x\rangle \otimes |1\rangle = |x\rangle |1\rangle = |x, 1\rangle$$

$$|\phi_1\rangle = (\mathbf{I} \otimes \mathbf{H}) |x\rangle |1\rangle = \frac{1}{\sqrt{2}} |x\rangle (|0\rangle - |1\rangle) = \frac{1}{\sqrt{2}} (|x, 0\rangle - |x, 1\rangle)$$

$$|\phi_2\rangle = |x\rangle \left( \frac{1}{\sqrt{2}} (|0 \oplus f(x)\rangle - |1 \oplus f(x)\rangle) \right)$$



## Final State – Version 2

By considering the function  $\overline{f(x)}$  denoting the **opposite** of  $f(x)$ , that is:  $\overline{f(x)} = (f(x) - 1) \bmod 2$  we get:

$$\begin{aligned} |\phi_2\rangle &= |x\rangle \frac{1}{\sqrt{2}} (|0 \oplus f(x)\rangle - |1 \oplus f(x)\rangle) \\ &= \frac{1}{\sqrt{2}} |x\rangle (|f(x)\rangle - |\overline{f(x)}\rangle) \\ &= \begin{cases} \frac{1}{\sqrt{2}} |x\rangle (|0\rangle - |1\rangle) & \text{if } f(x) = 0 \\ \frac{1}{\sqrt{2}} |x\rangle (|1\rangle - |0\rangle) & \text{if } f(x) = 1 \end{cases} \\ &= (-1)^{f(x)} \frac{1}{\sqrt{2}} |x\rangle (|0\rangle - |1\rangle) \end{aligned}$$


## Final State – Version 2

By considering the function  $\overline{f(x)}$  denoting the **opposite** of  $f(x)$ , that is:  $\overline{f(x)} = (f(x) - 1) \bmod 2$  we get:


$$\begin{aligned} |\phi_2\rangle &= |x\rangle \frac{1}{\sqrt{2}} (|0 \oplus f(x)\rangle - |1 \oplus f(x)\rangle) \\ &= \frac{1}{\sqrt{2}} |x\rangle (|f(x)\rangle - |\overline{f(x)}\rangle) \\ &= \begin{cases} \frac{1}{\sqrt{2}} |x\rangle (|0\rangle - |1\rangle) & \text{if } f(x) = 0 \\ \frac{1}{\sqrt{2}} |x\rangle (|1\rangle - |0\rangle) & \text{if } f(x) = 1 \end{cases} \\ &= (-1)^{f(x)} \frac{1}{\sqrt{2}} |x\rangle (|0\rangle - |1\rangle) \end{aligned}$$

**Problem:** Measuring  $|\phi_2\rangle$  does not reveal enough information.


# Deutsch's QCircuit

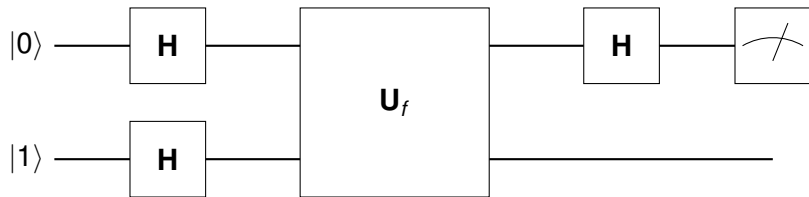

# Deutsch's QCircuit

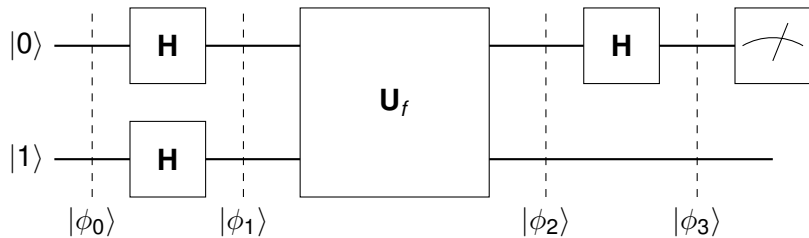


# Deutsch's QCircuit

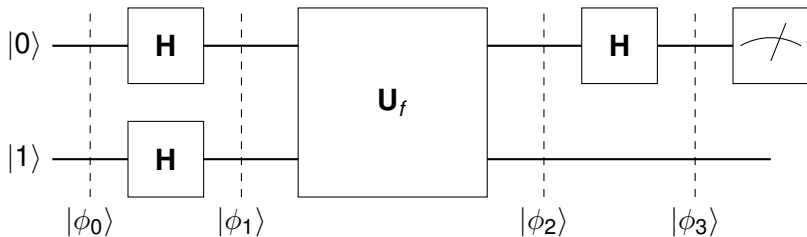

$$|\phi_0\rangle = |0\rangle \otimes |1\rangle = |0\rangle |1\rangle = |01\rangle$$


# Deutsch's QCircuit

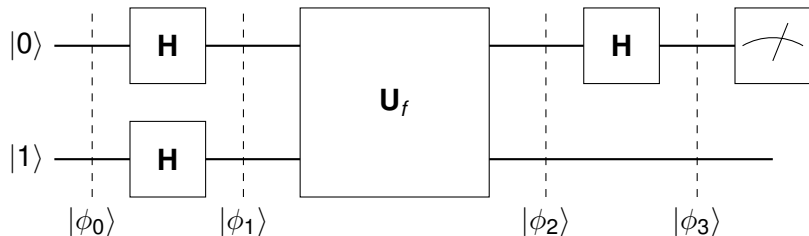


$$|\phi_0\rangle = |0\rangle \otimes |1\rangle = |0\rangle |1\rangle = |01\rangle$$

$$\begin{aligned} |\phi_1\rangle &= (\mathbf{H} \otimes \mathbf{H})(|0\rangle \otimes |1\rangle) \\ &= \frac{1}{\sqrt{2}}(|0\rangle + |1\rangle) \otimes \frac{1}{\sqrt{2}}(|0\rangle - |1\rangle) \\ &= \frac{1}{2}(|00\rangle - |01\rangle + |10\rangle - |11\rangle) \end{aligned}$$

# Deutsch's QCircuit

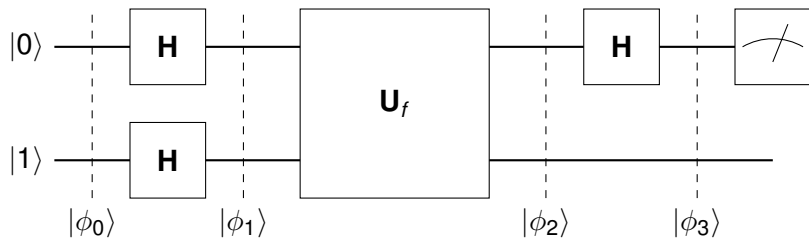


# Deutsch's QCircuit

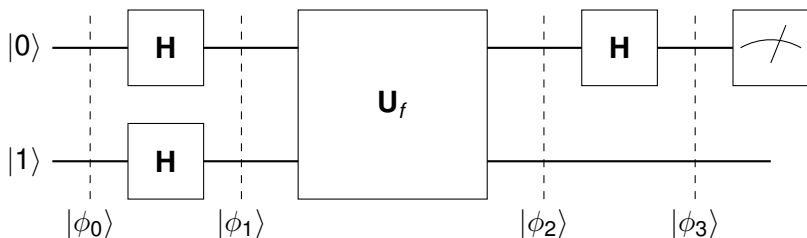

$$|\phi_2\rangle = \left( \frac{1}{\sqrt{2}}((-1)^{f(0)}|0\rangle + (-1)^{f(1)}|1\rangle) \right) \otimes \left( \frac{1}{\sqrt{2}}(|0\rangle - |1\rangle) \right)$$



# Deutsch's QCircuit

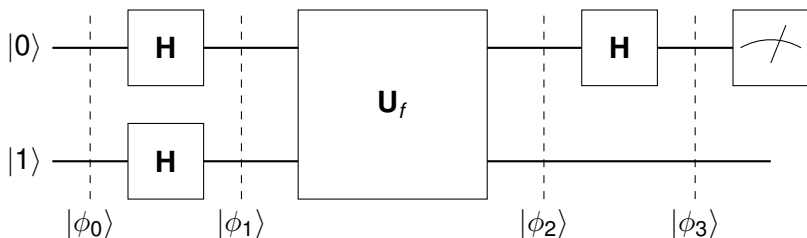

$$|\phi_2\rangle = \left( \frac{1}{\sqrt{2}}((-1)^{f(0)}|0\rangle + (-1)^{f(1)}|1\rangle) \right) \otimes \left( \frac{1}{\sqrt{2}}(|0\rangle - |1\rangle) \right)$$

For example, for the “swap” function, we get for the **top** qubit:

$$|\phi_2\rangle_1 = \frac{1}{\sqrt{2}}((-1)|0\rangle + (+1)|1\rangle) = -\frac{1}{\sqrt{2}}(|0\rangle - |1\rangle)$$

# The Final State

Investigating  $(-1)^{f(0)} |0\rangle + (-1)^{f(1)} |1\rangle$  closely, we describe  $|\phi_2\rangle$  as:

$$|\phi_2\rangle = \begin{cases} (\pm 1) \left( \frac{1}{\sqrt{2}} (|0\rangle + |1\rangle) \right) \otimes \left( \frac{1}{\sqrt{2}} (|0\rangle - |1\rangle) \right) & \text{if } f \text{ constant} \\ (\pm 1) \left( \frac{1}{\sqrt{2}} (|1\rangle - |0\rangle) \right) \otimes \left( \frac{1}{\sqrt{2}} (|0\rangle - |1\rangle) \right) & \text{if } f \text{ balanced} \end{cases}$$

# The Final State

Investigating  $(-1)^{f(0)} |0\rangle + (-1)^{f(1)} |1\rangle$  closely, we describe  $|\phi_2\rangle$  as:

$$|\phi_2\rangle = \begin{cases} (\pm 1) \left( \frac{1}{\sqrt{2}} (|0\rangle + |1\rangle) \right) \otimes \left( \frac{1}{\sqrt{2}} (|0\rangle - |1\rangle) \right) & \text{if } f \text{ constant} \\ (\pm 1) \left( \frac{1}{\sqrt{2}} (|1\rangle - |0\rangle) \right) \otimes \left( \frac{1}{\sqrt{2}} (|0\rangle - |1\rangle) \right) & \text{if } f \text{ balanced} \end{cases}$$

Applying Hadamard to the first qubit gives:

$$|\phi_3\rangle = \begin{cases} (\pm 1) |0\rangle \otimes \left( \frac{1}{\sqrt{2}} (|0\rangle - |1\rangle) \right) & \text{if } f \text{ constant} \\ (\pm 1) |1\rangle \otimes \left( \frac{1}{\sqrt{2}} (|0\rangle - |1\rangle) \right) & \text{if } f \text{ balanced} \end{cases}$$

# The Final State

Investigating  $(-1)^{f(0)} |0\rangle + (-1)^{f(1)} |1\rangle$  closely, we describe  $|\phi_2\rangle$  as:

$$|\phi_2\rangle = \begin{cases} (\pm 1) \left( \frac{1}{\sqrt{2}} (|0\rangle + |1\rangle) \right) \otimes \left( \frac{1}{\sqrt{2}} (|0\rangle - |1\rangle) \right) & \text{if } f \text{ constant} \\ (\pm 1) \left( \frac{1}{\sqrt{2}} (|1\rangle - |0\rangle) \right) \otimes \left( \frac{1}{\sqrt{2}} (|0\rangle - |1\rangle) \right) & \text{if } f \text{ balanced} \end{cases}$$


Applying Hadamard to the first qubit gives:

$$|\phi_3\rangle = \begin{cases} (\pm 1) |0\rangle \otimes \left( \frac{1}{\sqrt{2}} (|0\rangle - |1\rangle) \right) & \text{if } f \text{ constant} \\ (\pm 1) |1\rangle \otimes \left( \frac{1}{\sqrt{2}} (|0\rangle - |1\rangle) \right) & \text{if } f \text{ balanced} \end{cases}$$


For example, for the “swap” function, we get:

$$|\phi_3\rangle = (-1) |1\rangle \otimes \left( \frac{1}{\sqrt{2}} (|0\rangle - |1\rangle) \right).$$

# The Solution to Deutsch's Problem

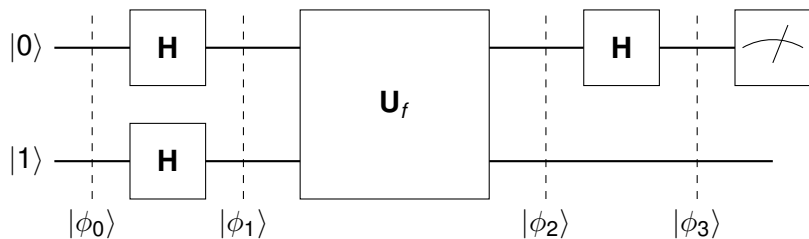


# The Solution to Deutsch's Problem

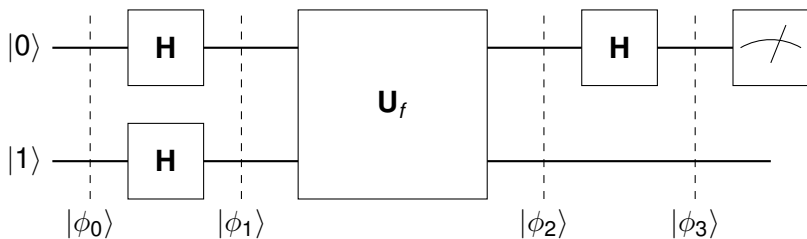

$$|\phi_3\rangle = \begin{cases} (\pm 1) |0\rangle \otimes \left(\frac{1}{\sqrt{2}}(|0\rangle - |1\rangle)\right) & \text{if } f \text{ constant} \\ (\pm 1) |1\rangle \otimes \left(\frac{1}{\sqrt{2}}(|0\rangle - |1\rangle)\right) & \text{if } f \text{ balanced} \end{cases}$$

# The Solution to Deutsch's Problem

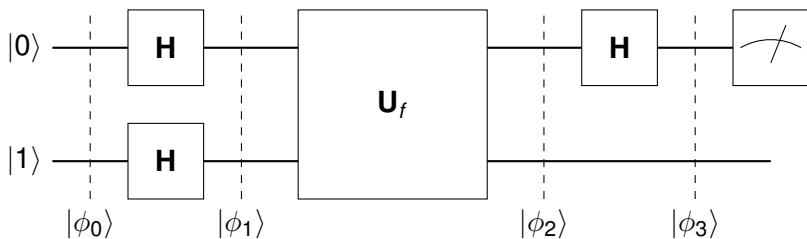

$$|\phi_3\rangle = \begin{cases} (\pm 1) |0\rangle \otimes \left(\frac{1}{\sqrt{2}}(|0\rangle - |1\rangle)\right) & \text{if } f \text{ constant} \\ (\pm 1) |1\rangle \otimes \left(\frac{1}{\sqrt{2}}(|0\rangle - |1\rangle)\right) & \text{if } f \text{ balanced} \end{cases}$$

Measuring the first/top qubit (in the standard base) now indicates with probability 1 whether we are in state  $|0\rangle$  or  $|1\rangle$ .

If we measure/observe

$|0\rangle$  then  $f$  is a **constant** function,

$|1\rangle$  then  $f$  is a **balanced** function.